



ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0171

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

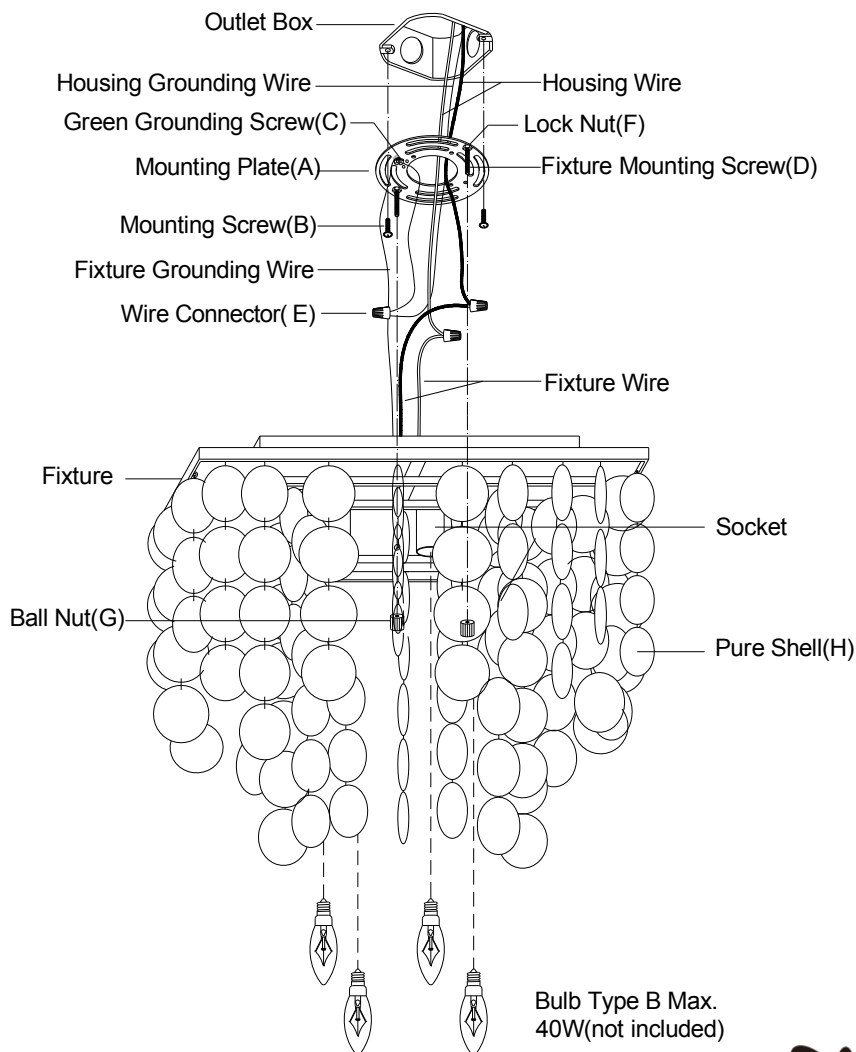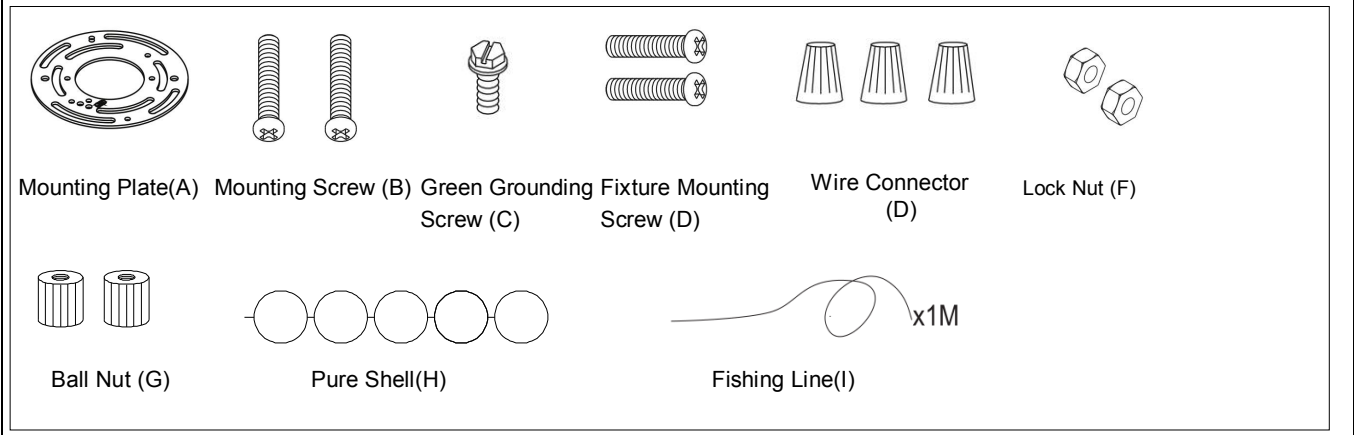


Bulb Type B Max.
40W(not included)

Installation Steps

Turn off the power at fuse or circuit box



1. Cut the "H" plastic buckles with scissor when take down the PE bags. (See Fig.1)
2. Remove the mounting plate from fixture by unscrewing two ball nuts.
3. Attach the mounting plate to the outlet box by using two mounting screws.
4. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting plate with the green grounding screw, and then connect it to the house grounding wire with the wire connector.
 Carefully put the wires back into the outlet box.
5. Attach the fixture to the mounting plate by inserting two fixture mounting screws into the holes, then tighten the fixture by screwing the ball nuts into the fixture mounting screw.
6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.

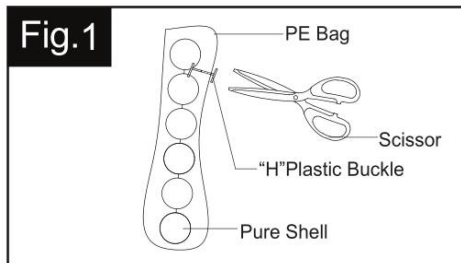

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

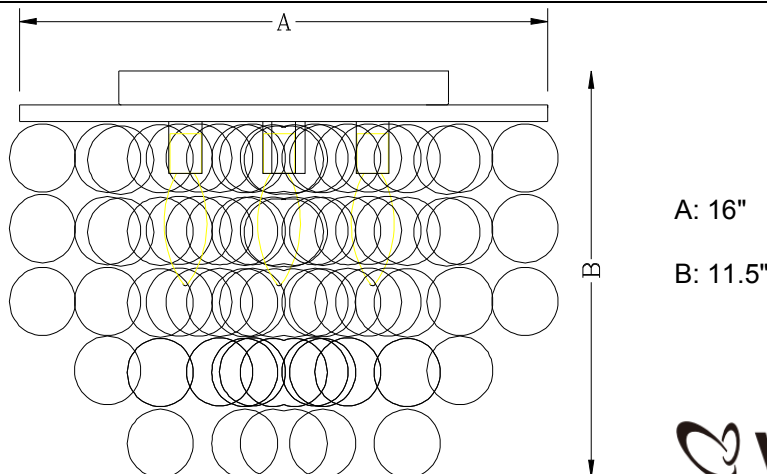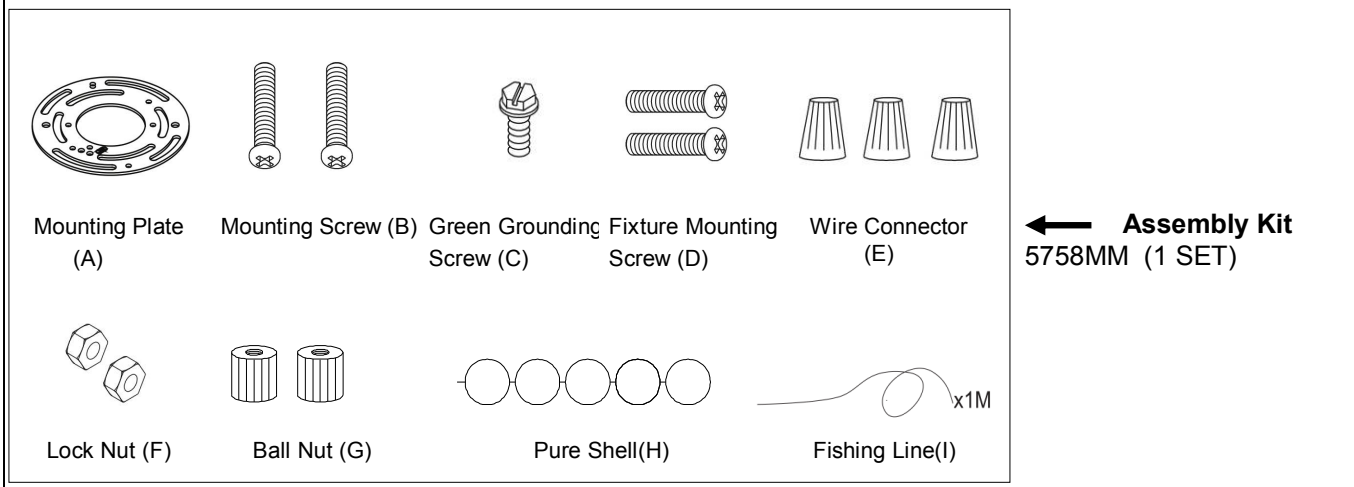

VAXCEL

170922